

Viatec UK

Westfield Business Centre
Radstock, Bath, BA3 4BH

Tel: 01761 409107

Fax: 01761 409111

info@viatec-uk.com

www.viatec-uk.com


VIATEC: UK Overbanding & Joint Sealing Viaseal Tapes




Hand application and torching of overbanding tape (Torching only necessary for wet and cold conditions)



Roller application of overbanding tape

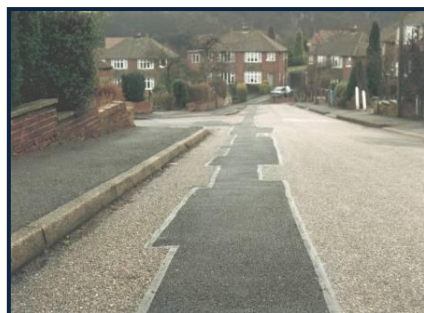

Overbanding of reinstatement in N Derbyshire Housing Estate Client Severn Trent Water

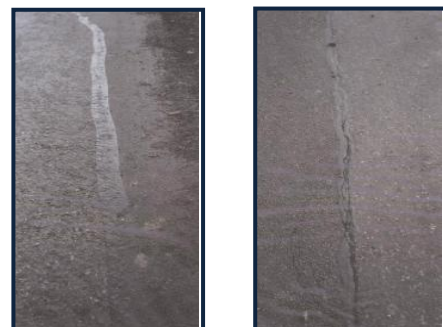

Viatec Overbanding Tape (L) Hot Poured Bitumen (R) Comparison, both applied on same date at road junction.

Viatec overbanding tape is manufactured with modified bituminous polymers and provides an instant waterproof seal over cracks or failed reinstatement joints of up to 5mm wide. The tape prevents water ingress and resultant cracking and fretting and eventual breakdown of the structure. Viaseal tape can be applied by hand or special roller and a gas torch flame can be used to help adhesion in wet and cold conditions. Viaseal tapes come in standard and anti-slip format in 10m rolls; 30, 40 and 50mm widths.

Viaseal Concrete Joint Sealant (CJS):

High performance, fuel and chemical resistant cold joint sealant for extreme climates and higher structural movement accommodation (up to 25%). CJS is manufactured to BS5212:1990 Types NF & B and is available in 5 litre containers, 600ml and 1500ml solid barrel guns. Viaseal contains no coal tar derivatives.

Viaseal Aerosol:

High bitumen content vertical joint sealant for utility reinstatements.

Viaseal Asphalt Plugs:

For the reinstatement of small core / bolt holes in asphalt - available in a variety of sizes.

Viatec

Tel: 01761 409107

Web: www.viatec-uk.com see live reports on YouTube & Vimeo